


DHW STORAGE TANKS

DHW STORAGE TANKS

ATX

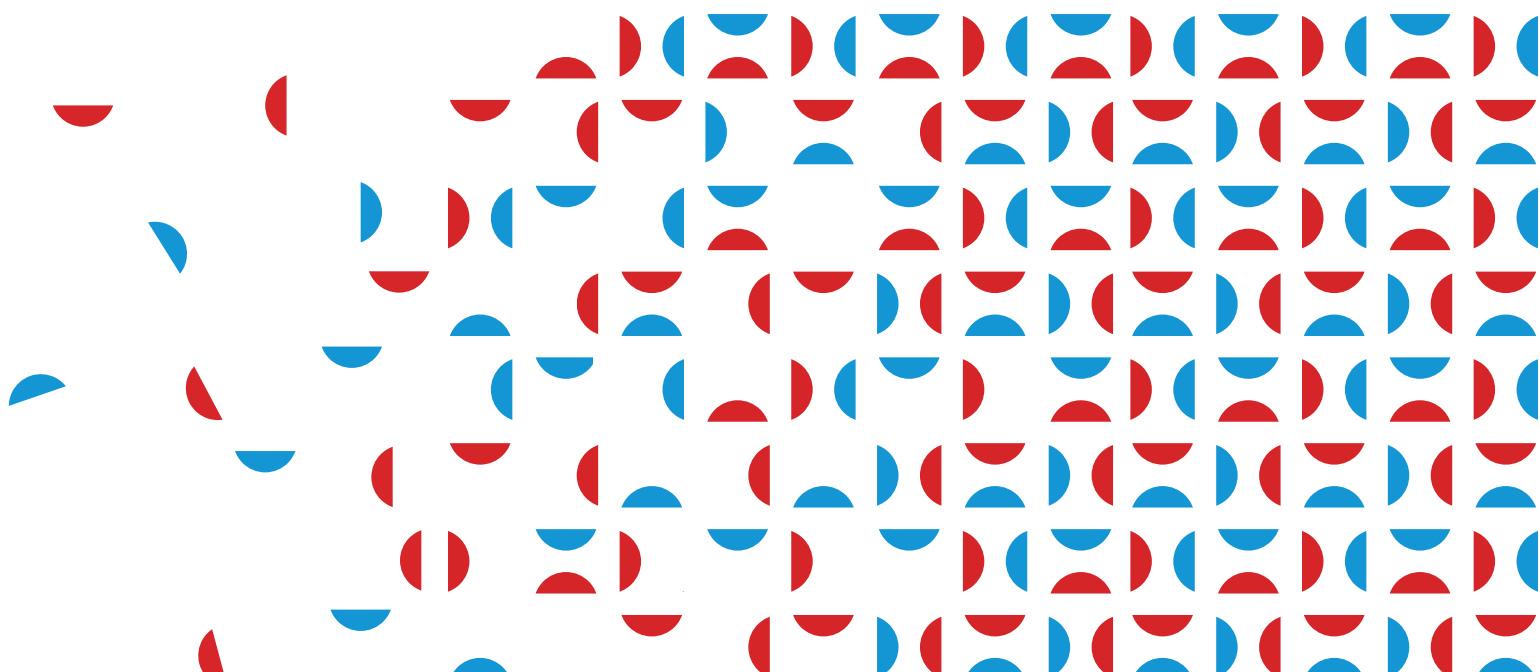

Storage Tanks for DHW ATX



PRICES

The ATX range consists of inertial hot water tanks made of highly corrosion-resistant stainless steel. The tanks are available in different capacities, from 200 to 5000 litres. They are equipped with flexible, highly insulating insulation and PVC lining, magnesium anode for protection against galvanic currents, and an inspection flange for easy access during inspection and maintenance.

Material: AISI 316 stainless steel

Internal protective treatment: pickling and passivation

Insulation

Capacity (l)	Type
from 200 to 5000	Polyester Fibre

Limit of use

Max. temperature	Max. pressure
95°C	6 bar

 **Accessories Included:** Magnesium sacrificial anode for all sizes.


 **Standard accessories:** see page 163

 **Special executions:** see page 165



TESTED

MATCH YOUR EXCHANGER (see p. 159)





**Integration with
WATEREADY**
See page 280



Cap. l	With hatchway			With vertical packaging
	Cod.*	Price	Energy class	Dimensions cm
200	317040188X	2.147,00 €	B	70x70x143
300	317040189X	2.342,00 €	B	80x80x160
500	317040190X	3.084,00 €	C	90x90x195
800	317040191X	3.724,00 €	C	100x100x200
1000	317040192X	4.395,00 €	C	110x110x230
1500	317040193X	6.946,00 €	C	130x130x240
2000	317040194X	9.026,00 €	C	150x150x250
2500	317040195X	9.755,00 €		150x150x280
3000	317040196X	10.575,00 €		150x150x300
4000	317040197X	13.306,00 €		170x170x305
5000	317040198X	18.028,00 €		190x190x310

Storage Tanks for DHW ATX

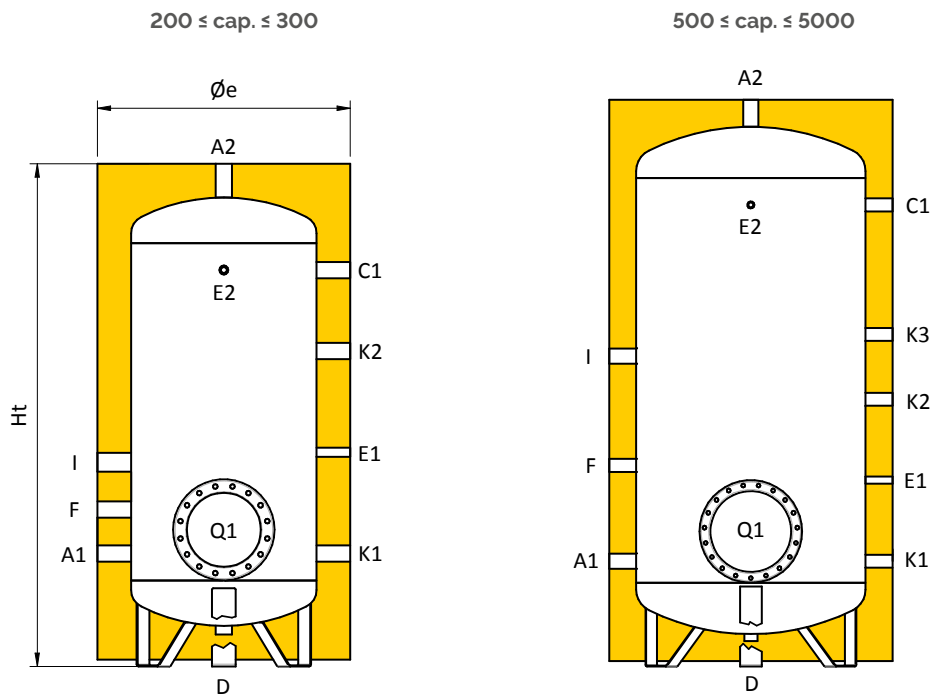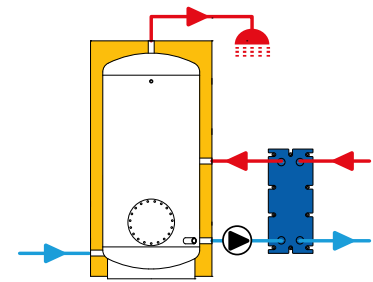

Legend bindings

A1	Domestic water inlet
A2	Domestic water outlet
C1	Anode
D	Drain
E1	Probe/Thermometer
E2	Probe/Thermometer
F	Recirculation
I	Electrical Resistance
K1	Auxiliary
K2	Auxiliary
K3	Auxiliary
Q1	Inspection port

Connection table

Cap. l	A1 inches	A2 inches	C1 inches	D inches	E1 inches	E2 inches	F inches	I inches	K1 inches	K2 inches	K3 inches	Q1 (Øext/Øint) mm
200	1 1/4	1 1/4	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	-	Ø300/Ø220
300	1 1/4	1 1/4	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	-	Ø300/Ø220
500	1 1/4	1 1/4	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø300/Ø220
800	1 1/2	1 1/2	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø380/Ø300
1000	1 1/2	1 1/2	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø380/Ø300
1500	2"	2"	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø380/Ø300
2000	2"	2"	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø430/Ø350
2500	2 1/2	2 1/2	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø430/Ø350
3000	3"	3"	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø430/Ø350
4000	3"	3"	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø430/Ø350
5000	3"	3"	1 1/4	1 1/4	1/2"	1/2"	1 1/4	1 1/2	1 1/4	1 1/4	1 1/4	Ø430/Ø350

Table of heights

Cap. l	Øe mm	Ht mm	R* mm	A1 mm	C1 mm	E1 mm	E2 mm	F mm	I mm	K1 mm	K2 mm	K3 mm	Q1** mm
200	650	1410	1535	295	1135	595	1135	425	540	295	915	-	365
300	750	1490	1650	335	1175	635	1175	465	605	335	935	-	405
500	850	1770	1945	350	1420	650	1420	650	935	350	950	1190	420
800	990	1810	2045	370	1440	670	1440	700	1150	370	990	1210	480
1000	1050	2100	2330	390	1710	690	1710	745	1150	390	990	1230	500
1500	1250	2235	2555	490	1800	795	1800	795	1205	490	1090	1330	590
2000	1450	2315	2725	525	1835	830	1835	830	1240	525	1125	1365	650
2500	1400	2640	2895	560	2145	860	2145	845	1545	560	1160	1400	670
3000	1450	2850	3155	565	2340	790	2340	840	1740	565	1040	1405	680
4000	1600	2920	3295	590	2370	890	2370	860	1770	590	1190	1430	705
5000	1800	2960	3425	600	2375	900	2375	875	1775	600	1200	1440	715

R*: Tipping height

Q1**: height from the centre of the hatch to the ground

Wenkel S.r.l

Registered and operating office: Via E. Mattei 13/F – 31030 Casier (TV) – P.I. e C.F. 08456530966 – REA: TV-422447

Registered with the Companies' Register of Treviso-Belluno under No. 08456530966 – Share Capital €98.000,00

Tel. 0422/672911 • Fax 0422/340425 • e-mail: info@heizersile.it • www.heizersile.com

Subject to control and coordination by Fiorini Industries S.r.l.

