



PRE-AUTOCLAVES

GALVANISED PRE-AUTOCLAVES

WITH ACCESSORIES "A" AND "B"

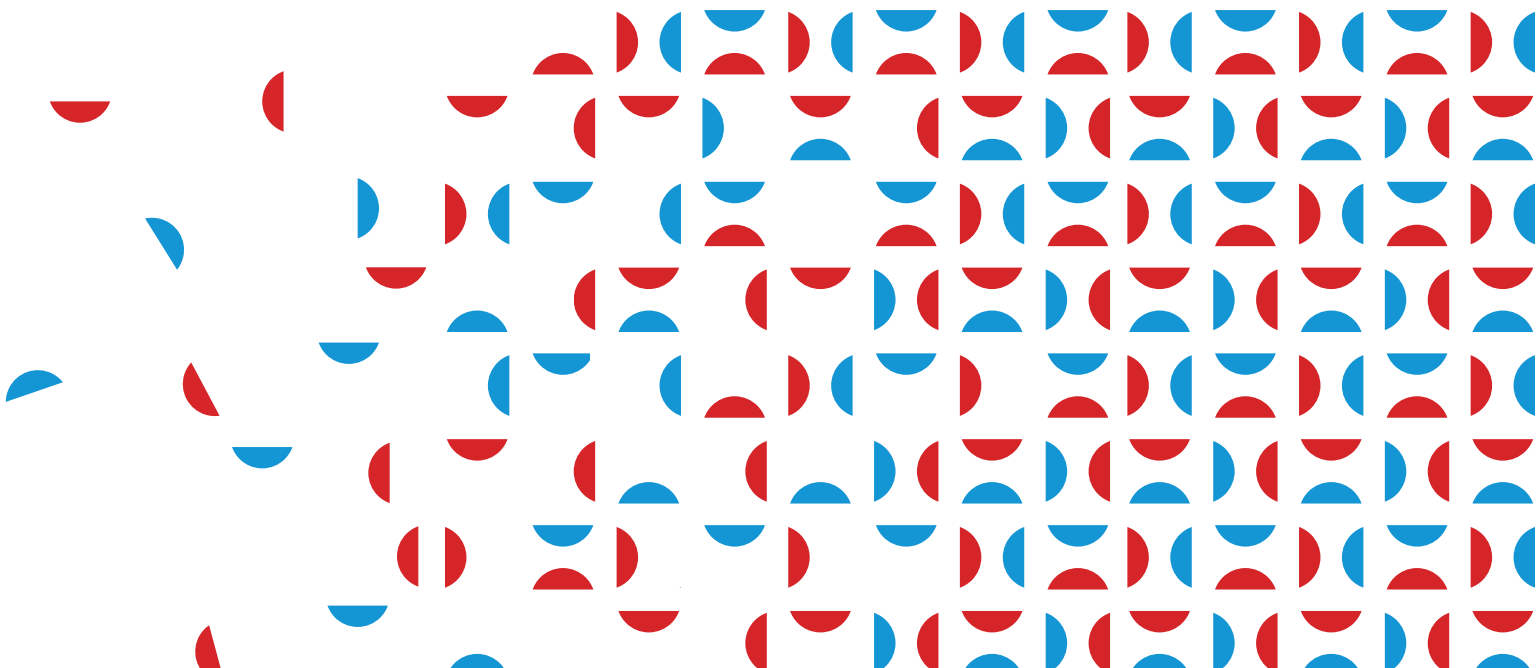

Galvanised pre-autoclaves with accessories "A" compressor and accessories "B" mains air



PRICES
A



PRICES
B

Hot-dip galvanised steel hydraulic flywheel pre-boilers are vessels designed to supply a water lifting unit operating with suction from a pressurised water network

Allowed temperature: -10 +49°C.

Equipped with all accessories (type 'A' or 'B') already fitted and complete with electrical wiring on IP54 panel.

CE certified according to European Dir. 2014/68/EU-PED as "ASSEMBLY". The assemblies are subject to the Declaration of Commissioning (Ministerial Decree 329 of 01/12/2004)

- Horizontal versions are made on request.
- Anti-condensation insulation in closed-cell, cross-linked polyethylene and PVC external finish on request
- Anti-condensation insulation in closed-cell reticulated polyethylene and external finish in aluminium foil on request



A' accessories

B' Accessories

SURCHARGE FOR ADAPTATION OF CONNECTIONS TO EXISTING TANK € 995.00

Technical Specifications

Capacity	Dimensions		Pre-autoclave assemblies with 'A' accessories		Pre-autoclave assemblies with 'B' accessories	
			for air loading with compressor		for loading from compressed air network	
			Opposing connections		Opposing connections	
L	Ø mm	H mm	Code	Price	Code	Price
Pre-autoclave assemblies at max. allowed pressure 6 bar						
500	650	1800	00713420500	5.522,00 €	00713520500	4.199,00 €
800	790	1960	00713420800	5.979,00 €	00713520800	4.654,00 €
1000	790	2360	00713421000	6.358,00 €	00713521000	4.995,00 €
1500	1000	2270	00713421500	7.727,00 €	00713521500	6.746,00 €
2000	1100	2470	00713422000	8.743,00 €	00713522000	7.657,00 €
3000	1300	2670	00713423000	11.860,00 €	00713523000	11.032,00 €
4000	1300	3450	00713424000	14.562,00 €	00713524000	13.450,00 €
5000	1400	3700	00713425000	15.763,00 €	00713525000	14.673,00 €
Pre-autoclave assemblies at max. allowed pressure 8 bar						
500	650	1800	00713440500	5.639,00 €	00713540500	4.358,00 €
800	790	1960	00713440800	6.206,00 €	00713540800	4.882,00 €
1000	790	2360	00713441000	6.584,00 €	00713541000	5.343,00 €
1500	1000	2270	00713441500	8.546,00 €	00713541500	7.180,00 €
2000	1100	2470	00713442000	9.591,00 €	00713542000	8.526,00 €
3000	1300	2670	00713443000	12.682,00 €	00713543000	11.351,00 €
4000	1300	3450	00713444000	15.114,00 €	00713544000	14.022,00 €
5000	1400	3700	00713445000	17.560,00 €	00713545000	16.469,00 €
Pre-autoclave assemblies at max. allowed pressure 10 bar						
300	550	1500	00713450300	5.117,00 €	00713550300	4.709,00 €
500	650	1800	00713450500	5.965,00 €	00713550500	4.764,00 €
800	790	1960	00713450800	6.882,00 €	00713550800	5.733,00 €
1000	790	2360	00713451000	7.707,00 €	00713551000	6.042,00 €
1500	1000	2270	00713451500	9.046,00 €	00713551500	7.993,00 €
2000	1100	2470	00713452000	9.932,00 €	00713552000	9.272,00 €
3000	1300	2670	00713453000	13.273,00 €	00713553000	12.182,00 €
4000	1300	3450	00713454000	15.708,00 €	00713554000	14.617,00 €
5000	1400	3700	00713455000	18.145,00 €	00713555000	17.053,00 €
Pre-autoclave assemblies at max. allowed pressure 12 bar						
300	550	1500	00713460300	6.439,00 €	00713560300	5.337,00 €
500	650	1800	00713460500	6.869,00 €	00713560500	5.767,00 €
800	790	1960	00713460800	7.893,00 €	00713560800	7.804,00 €
1000	790	2360	00713461000	9.853,00 €	00713561000	7.332,00 €
1500	1000	2270	00713461500	10.461,00 €	00713561500	9.360,00 €
2000	1100	2470	00713462000	12.325,00 €	00713562000	11.213,00 €
3000	1300	2670	00713463000	15.852,00 €	00713563000	14.750,00 €
4000	1300	3450	00713464000	17.780,00 €	00713564000	16.601,00 €
5000	1400	3700	00713465000	20.228,00 €	00713565000	19.060,00 €

PLEASE NOTE

The indicated heights refer to the product without safety valve (approx. 12 cm).

comprising: three-phase 400 V electric air compressor, 230 V compressor head vent solenoid valve, air check valve, air interception tap, vibration-damping fitting, float level regulator, compressor pressure switch, calibrated minimum pressure switch 1 bar, compressor switch box, level indicator with Plexiglas tube and protection (with multiple reflex boxes for 12 bar), P.E.D. certified safety valve pressure gauge with gauge holder tap, drain valve.

comprising: pressure regulator with filter and pressure gauge, 230 V air inlet solenoid valve, air non-return valve, air shutoff valve, float level regulator, solenoid valve pressure switch, calibrated minimum pressure switch 1 bar, electrical wiring board, level indicator with Plexiglas tube and protection (multiple reflection box for 12 bar), P.E.D. certified safety valve, pressure gauge with pressure gauge holder tap, drain valve.

Wenkel S.r.l

Registered and operating office: Via E. Mattei 13/F – 31030 Casier (TV) – P.I. e C.F. 08456530966 – REA: TV-422447

Registered with the Companies' Register of Treviso-Belluno under No. 08456530966 – Share Capital €98.000,00

Tel. 0422/672911 • Fax 0422/340425 • e-mail: info@heizersile.it • www.heizersile.com

Subject to control and coordination by Fiorini Industries S.r.l.

