


AUTOCLAVES


MONOBLOCK AUTOCLAVES

MVX INVERTER

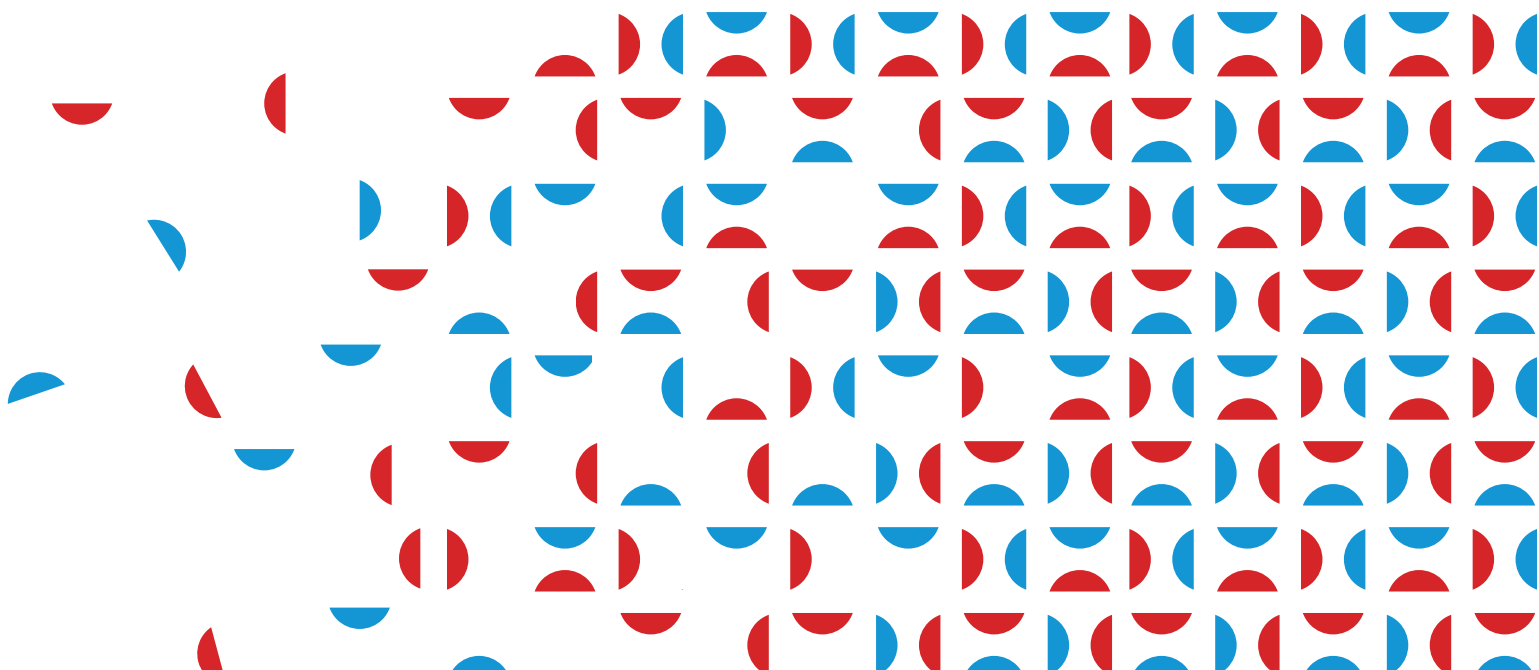

Monoblock autoclaves

MVZ INVERTER



PRICES

Vertical monoblock autoclaves for water lifting, made of galvanised steel with two 400/3 V inverter pumps equipped with digital control panel.

All autoclaves are equipped as standard with a compressor or compressed air network loading, a general electric panel and regulatory safety accessories.

Allowed temperature: -10 +49°C.

System entirely pre-assembled, wired and tested in-house.

CE certified according to European Dir. 2014/68/EU-PED as an "ASSEMBLY". The assemblies are subject to the Declaration of Commissioning (D.M. 329 of 01/12/2004).

- Horizontal versions are made on request.
- Anti-condensation insulation in closed-cell cross-linked polyethylene and PVC external finish on request
- Anti-condensation insulation in closed-cell reticulated polyethylene and external finish in aluminium foil on request



variant with
air from mains

SURCHARGE FOR ADAPTATION OF CONNECTIONS TO EXISTING TANK € 995.00

Technical Specifications

Capacity	N° flats individual services	Pressure max.	Total capacity pumps	Set point pumps	Single Pump Power	Head max.	Overall dimensions H x W x D	Code	Price
l		bar	L/h	bar	kW	m	mm		
MVZ - Galvanised steel monoblock with compressor									
300	10÷20	10	11000	3,50	1,1	50,00	1600x1150x750	00743600300	upon request
500	22÷40	6	19000	4,50	2,2	70,00	1900x1250x850	00743600500	
500	22÷40	8	19000	4,50	2,2	70,00	1900x1250x850	00743700500	
800	40÷50	6	19000	4,50	2,2	70,00	2060x1400x1000	00743600800	
800	40÷50	8	19000	4,50	2,2	70,00	2060x1400x1000	00743700800	
1000	50÷60	6	19000	4,50	2,2	70,00	2460x1400x1000	00743601000	
1000	50÷60	8	19000	4,50	2,2	70,00	2460x1400x1000	00743701000	
1500	60÷65	6	19000	4,50	2,2	70,00	2370x1600x1200	00743601500	
1500	60÷65	8	19000	4,50	2,2	70,00	2370x1600x1200	00743701500	
2000	65÷70	6	19000	4,50	2,2	70,00	2570x1700x1300	00743602000	
2000	65÷70	8	19000	4,50	2,2	70,00	2570x1700x1300	00743702000	
MVZ - Galvanised steel monoblock with air net loading									
300 *	10÷20	10	11000	3,50	1,1	50	1600x1150x750	00743610300	upon request
500	22÷40	6	19000	4,50	2,2	70,00	1900x1250x850	00743610500	
500	22÷40	8	19000	4,50	2,2	70,00	1900x1250x850	00743710500	
800	40÷50	6	19000	4,50	2,2	70,00	2060x1400x1000	00743610800	
800	40÷50	8	19000	4,50	2,2	70,00	2060x1400x1000	00743710800	
1000	50÷60	6	19000	4,50	2,2	70,00	2460x1400x1000	00743611000	
1000	50÷60	8	19000	4,50	2,2	70,00	2460x1400x1000	00743711000	
1500	60÷65	6	19000	4,50	2,2	70,00	2370x1600x1200	00743611500	
1500	60÷65	8	19000	4,50	2,2	70,00	2370x1600x1200	00743711500	
2000	65÷70	6	19000	4,50	2,2	70,00	2570x1700x1300	00743612000	
2000	65÷70	8	19000	4,50	2,2	70,00	2570x1700x1300	00743712000	

PLEASE NOTE The indicated heights refer to the product without safety valve (approx. 12 cm).

Monoblock autoclaves

MVX INVERTER



PRICES

Vertical monoblock autoclaves for water lifting, made of AISI 304 stainless steel, with two 400/3 V inverter pumps equipped with digital control panel.

All autoclaves are equipped as standard with a compressor or compressed air network loading, a general electric panel and regulatory safety accessories.

Allowed temperature: -10 +49°C.

System entirely pre-assembled, wired and tested in-house.

CE certified according to European Dir. 2014/68/EU-PED as an "ASSEMBLY". The assemblies are subject to the Declaration of Commissioning (D.M. 329 of 01/12/2004).

- Horizontal versions are made on request.
- Anti-condensation insulation in closed-cell cross-linked polyethylene and PVC external finish on request
- Anti-condensation insulation in closed-cell reticulated polyethylene and external finish in aluminium foil on request



variant with
air from mains

SURCHARGE FOR ADAPTATION OF CONNECTIONS TO EXISTING TANK € 995.00

Technical Specifications

Capac- ity	N° flats individual services	Pressure max.	Total capac- ity pumps	Set point pumps	Single Pump Power	Head max.	Overall dimensions H x W x D	Code	Price
L		bar	L/h	bar	kW	m	mm		
MVX - AISI 304 stainless steel monoblock with 6 bar compressor									
500	10÷22	6	11000	3,50	2,2	50	1650x1300x900	00743650500	upon request
800	40÷50	6	19000	4,50	2,2	70	2060x1460x1200	00743650800	
1000	50÷60	6	19000	4,50	2,2	70	1960x1500x1100	00743651000	
1500	60÷65	6	19000	4,50	2,2	70	2310x1660x1300	00743651500	
MVX - AISI 304 stainless steel monoblock with compressed air supply 6 bar									
500	10÷22	6	11000	3,50	2,2	50	1650x1300x900	00743660500	upon request
800	40÷50	6	19000	4,50	2,2	70	2060x1460x1200	00743660800	
1000	50÷60	6	19000	4,50	2,2	70	1960x1500x1100	00743661000	
1500	60÷65	6	19000	4,50	2,2	70	2310x1660x1300	00743661500	
MVX - AISI 304 stainless steel monoblock with 8 bar compressor									
500	10÷22	8	11000	3,50	2,2	50	1650x1300x900	00743720500	upon request
800	40÷50	8	19000	4,50	2,2	70	2060x1460x1200	00743720800	
1000	50÷60	8	19000	4,50	2,2	70	1960x1500x1100	00743721000	
1500	60÷65	8	19000	4,50	2,2	70	2310x1660x1300	00743721500	
MVX - AISI 304 stainless steel monoblock with compressed air supply 8 bar									
500	10÷22	8	11000	3,50	2,2	50	1650x1300x900	00743730500	upon request
800	40÷50	8	19000	4,50	2,2	70	2060x1460x1200	00743730800	
1000	50÷60	8	19000	4,50	2,2	70	1960x1500x1100	00743731000	
1500	60÷65	8	19000	4,50	2,2	70	2310x1660x1300	00743731500	


PLEASE NOTE The indicated heights refer to the product without safety valve (approx. 12 cm).

Monoblock autoclaves

MVZ - MVX




Components

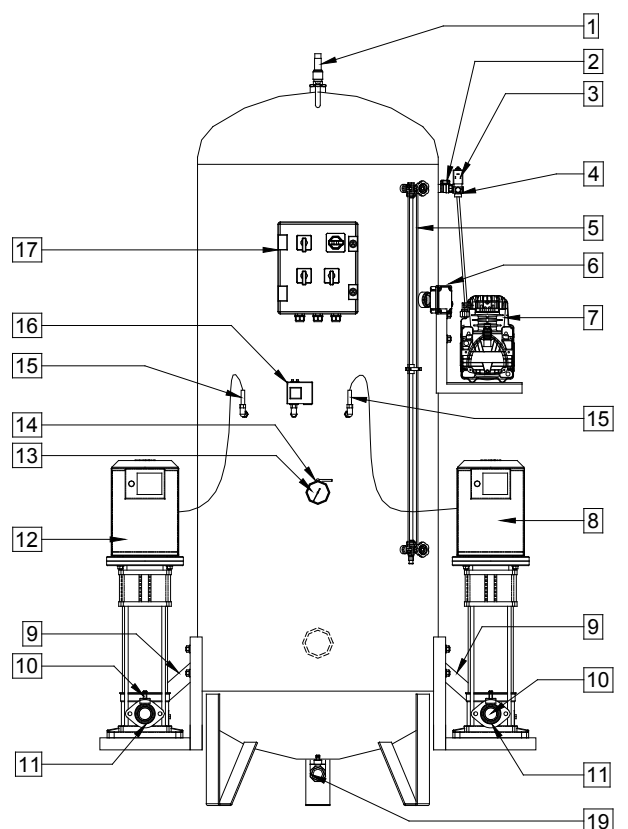

Legend bindings

1	Spring-loaded safety valve for air Ø 1/2" set at 8 bar
2	Ø 1/2" air shut-off ball valve
3	Compressor head status solenoid valve
4	Air check valve
5	Visual level indicator Ø 1/"" with protection and acrylic tube
6	Compressor start-up level switch
7	Air compressor 0.75 kW
8	Inverter pump (pump 2)
9	No. 2 anti-vibration hoses
10	No. 2 shut-off valves on pump suction
11	No. 2 check valves on pump suction
12	Inverter pump (pump 1)
13	Manometer
14	3V brass manometer tap
15	No. 2 pressure transducers
16	Compressor stop pressure switch
17	Electrical cabinet
18	No. 2 shut-off valves on pump discharge
19	Exhaust valve Ø 1"

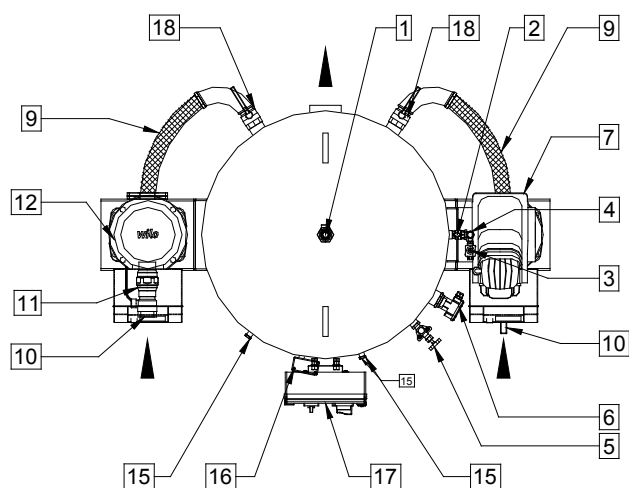

Wenkel S.r.l

Registered and operating office: Via E. Mattei 13/F – 31030 Casier (TV) – P.I. e C.F. 08456530966 – REA: TV-422447

Registered with the Companies' Register of Treviso-Belluno under No. 08456530966 – Share Capital €98.000,00

Tel. 0422/672911 • Fax 0422/340425 • e-mail: info@heizersile.it • www.heizersile.com

Subject to control and coordination by Fiorini Industries S.r.l.

